
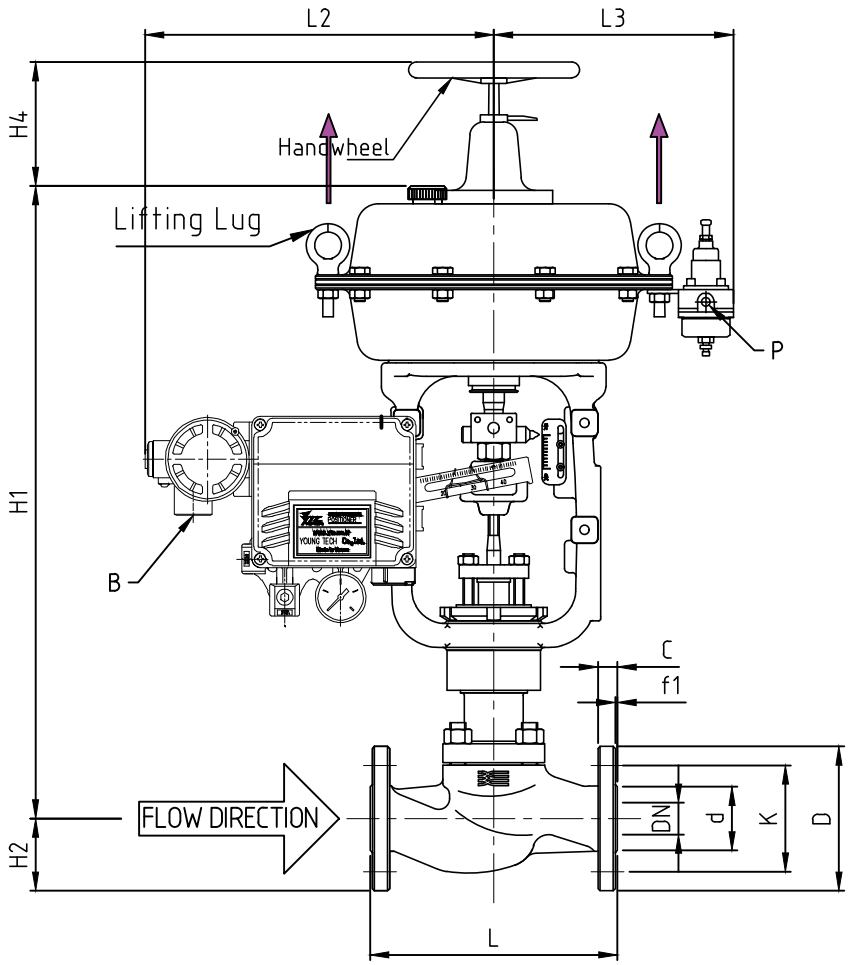


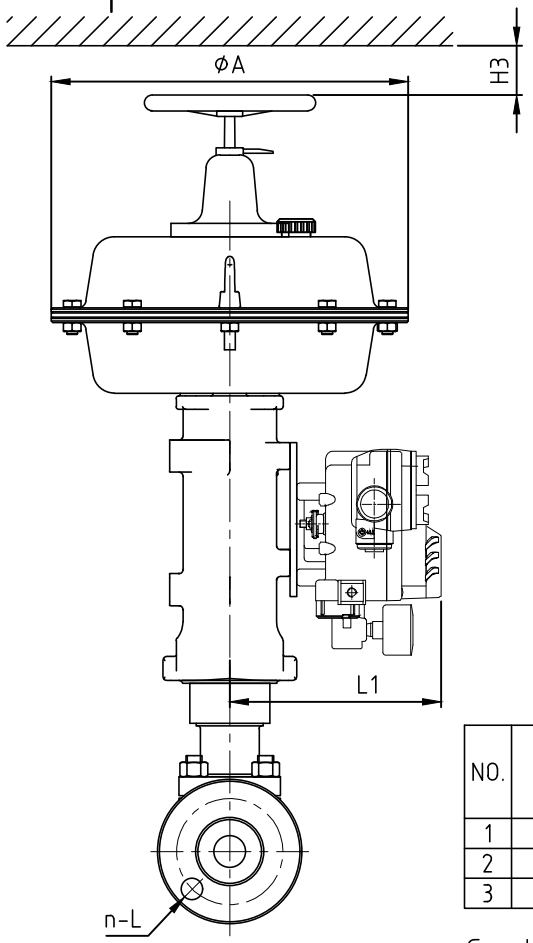

SPEC.			
	PRESSURE	PN16	
TEST	SHELL (LIQ)	2.40	MPa
	SEAL (LIQ)	1.76	
	LEAKAGE	0.35	
OPE.TEMP.		-17℃~+230℃	

General considerations

B: 1/2NPT threaded connection, for positioner control signal interface (user connection)

P: 1/4NPT threaded connection for connecting the valve to the user's instrument air source (user connection)

All dimensions are:mm

1, The shape and structure of the accessories shown in this figure are for dimension identification purposes only and shall not be used as the basis for final ordering; the specific product configuration shall be subject to the quotation for the final ordered product mode.


TECHNICAL SPEC.

1. DESIGN&MAN.ACC.TO GB/T12224;
2. FLANGE DIMENSION ACC.TO HG/T20592;
3. FACE TO FACE ACC.TO GB/T17213.3;
4. TEST&SPEC. ACC. TO GB/T4213;

NO.	Tag No.	Nominal Size		Rating	End Connection (HG/T20592 RF)					
		DN	NPS		D	K	d	f1	C	n-L
1	/	DN15	½	PN16	95	65	45	2	16	4-14
2	/	DN20	3/4	PN16	105	75	58	2	18	4-14
3	/	DN25	1	PN16	115	85	68	2	18	4-14

Continue the table above

NO.	Actuator	H1	H2	H3 For act.min. high	H4	A	L3	L2	F T F L	L1	Wet. (kg)
1	LHA2D/R	450	48	300	110	281	220	260	184	210	23
2	LHA2D/R	450	53	300	110	281	220	260	184	210	23
3	LHA2D/R	450	58	300	110	281	220	260	184	210	24

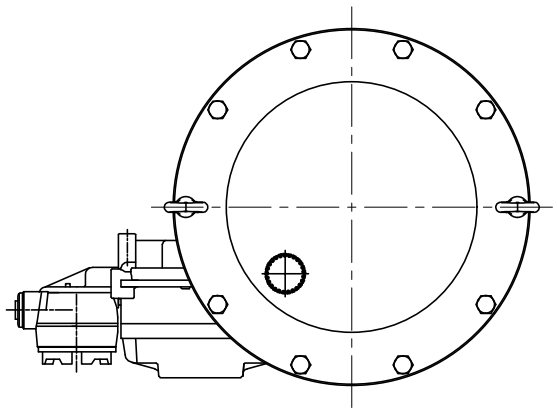

用于提升

FOR LIFTING

标记	处数	分区	更改文件号	签名	日期
设计			标准化		
审核					
工艺			批准		

Globe Series - DLS Pneumatic Small Bore Single Seat Control Valve - Pneumatic Diaphragm Actuator - and Accessories

阶段标记				质量	比例
S	A	B	C		1:4

共1张 第1张

浙江瀚沃自控仪表有限公司

Dimensions drawing

DLS.15/25-16-10-WX