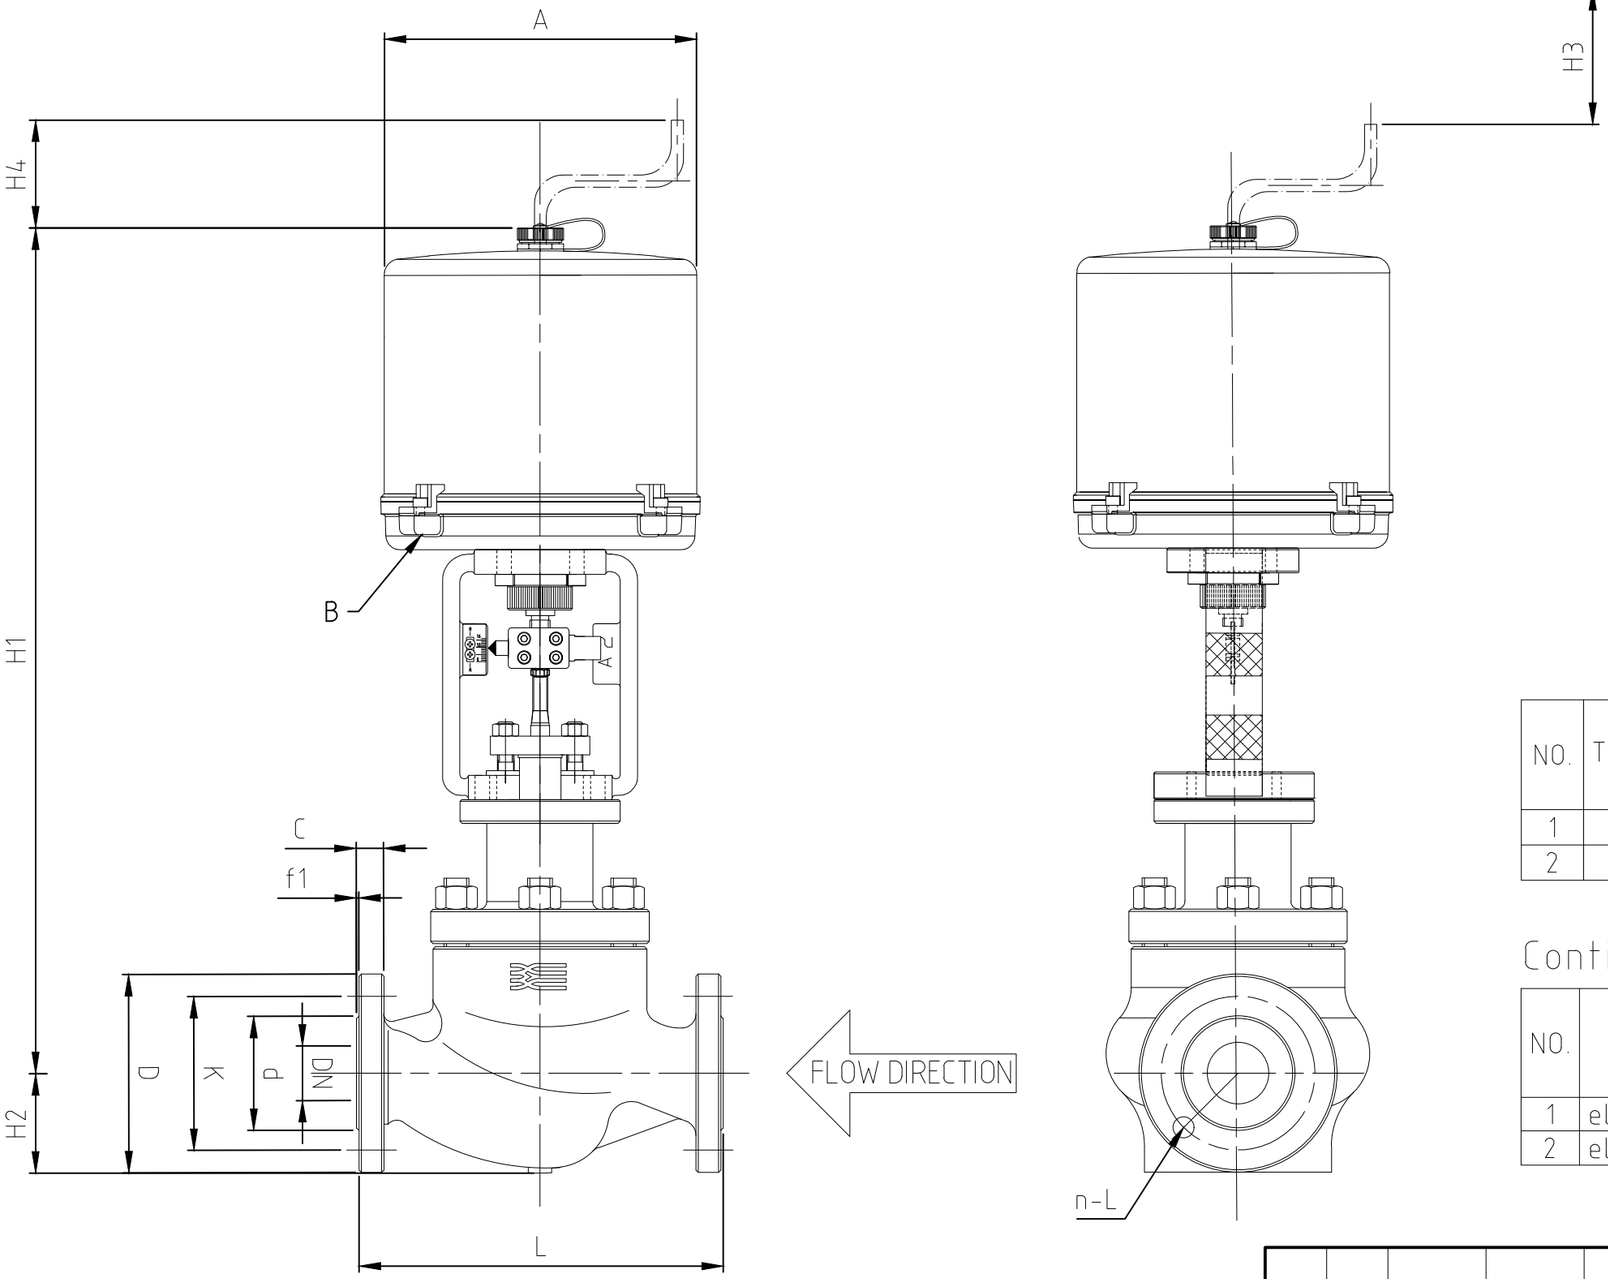



| SPEC. | | | |
|---|---|---|---|
| | PRESSURE | PN16 | |
| TEST | SHELL (LIQ) | 2.40 | MPa |
| | SEAL (LIQ) | 1.76 | |
| | LEAKAGE | 0.35 | |
| OPE.TEMP. | | -17℃~+230 ℃ | |

## General considerations

B: G3/4", M20×1.5 (other interface sizes as per specification or relevant documents) threaded interface, for electric actuator control signal interface (user connection)

All dimensions are:mm

1、Input Voltage:
AC380V、AC220V/50HZ (Optional)。
2、Ex. Class: N/A、ExdII BT4(Optional)
3、The shape and structure of the accessories shown in this figure are for dimension identification purposes only and shall not be used as the basis for final ordering; the specific product configuion shall be subject to the quotation for the final ordered product model.。

| NO. | Tag No. | Nominal Size | | Rating | End Connection (HG/T20592-2009 RF) | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | DN | NPS | | D | K | d | f1 | C | n-L |
| 1 | / | DN50 | 2 | PN16 | 165 | 125 | 102 | 2 | 18 | 4-18 |
| 2 | / | DN150 | 6 | PN16 | 285 | 240 | 212 | 2 | 22 | 8-22 |

## Continue the table above

| NO. | Actuator | H1 | H2 | H3 For act.min. high | H4 | A | F T F L | Wet. (kg) |
|---|---|---|---|---|---|---|---|---|
| 1 | electric actuator | 726 | 80 | 300 | 90 | 310 | 254 | 45 |
| 2 | electric actuator | 1190 | 143 | 450 | 90 | 310 | 451 | 162 |

## TECHNICAL SPEC.

1. DESIGN&MAN.ACC.TO GB/T12224-2015;
2. FLANGE DIMENSION ACC.TO HG/T20592-2009;
3. FACE TO FACE ACC.TO GB/T17213.3-2005;
4.TEST&SPEC. ACC. TO JB/T7387-2002;
5. LEAKAGE TEST ACC. TO ANSI/FCI70-2。

| 标记 | 处数 | 分区 | 更改文件号 | 签名 | 日期 | Globe Series-EDTCB Electric Cage Control Valve (Improved Type) - Electric Actuator | | | | ZHEJIANG PARI WORLD AUTO. METER CO.,LTD |
|---|---|---|---|---|---|---|---|---|---|---|
| 设计 | | | 标准化 | | | 阶段标记 | | 质量 | 比例 | Dimensions drawing |
| | | | | | | S | A B C | | 1:4 | EDTCB.50/150-16-10-WX |
| 审核 | | | | | | 共1张 | 第1张 | | | |
| 工艺 | | | 批准 | | | | | | | |