
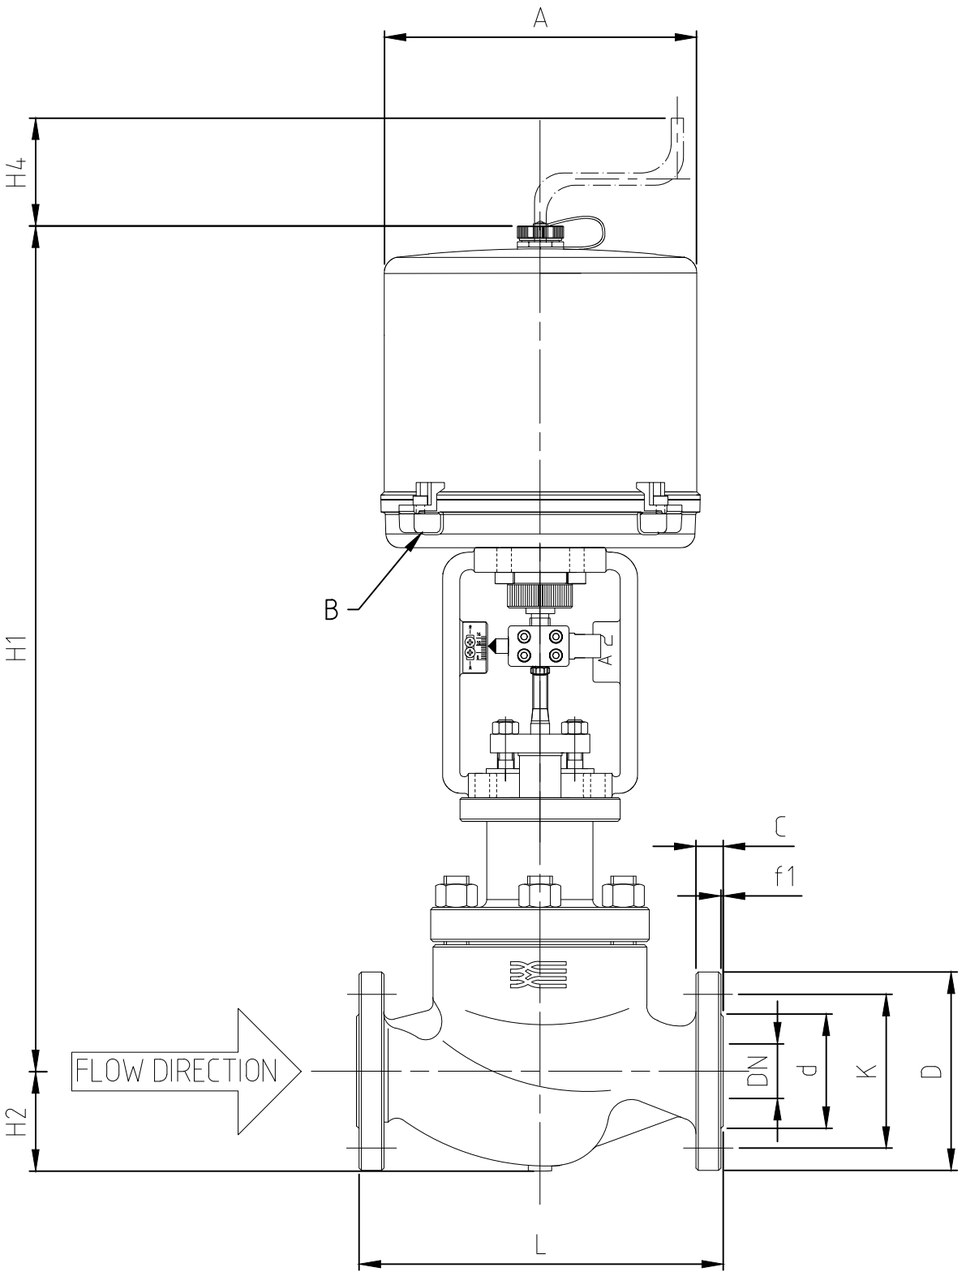


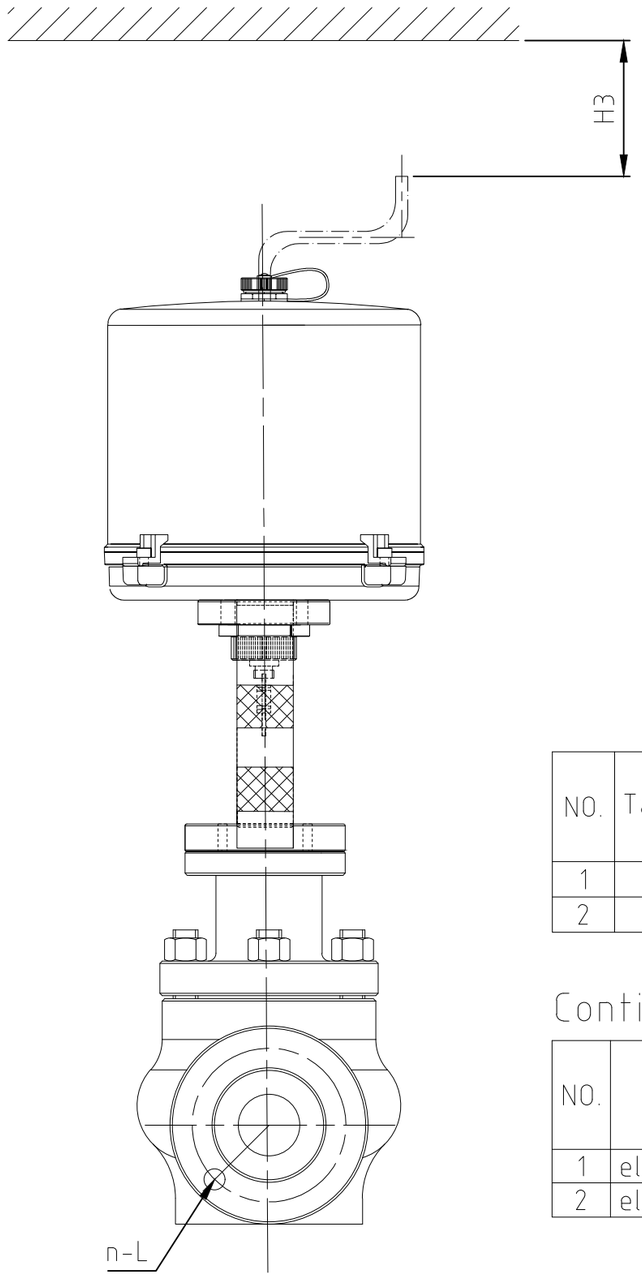

SPEC.			
	PRESSURE	PN16	
TEST	SHELL (LIQ)	2.40	MPa
	SEAL (LIQ)	1.76	
	LEAKAGE	0.35	
OPE.TEMP.		-17℃~+230 ℃	

General considerations

B: G3/4", M20×1.5 (other interface sizes as per specification or relevant documents) threaded interface, for electric actuator control signal interface (user connection)

All dimensions are:mm

1、Input Voltage:
AC380V、AC220V/50HZ (Optional)。
2、Ex. Class: N/A、ExdII BT4(Optional)
3、The shape and structure of the accessories shown in this figure are for dimension identification purposes only and shall not be used as the basis for final ordering; the specific product configuion shall be subject to the quotation for the final ordered product model.。

NO.	Tag No.	Nominal Size		Rating	End Connection (HG/T20592-2009 RF)					
		DN	NPS		D	K	d	f1	C	n-L
1	/	DN40	1½	PN16	150	110	88	2	18	4-18
2	/	DN100	4	PN16	220	180	158	2	20	8-18

Continue the table above

NO.	Actuator	H1	H2	H3 For act.min. high	H4	A	F T F L	Wet. (kg)
1	electric actuator	556	70	300	90	310	222	35
2	electric actuator	761	110	400	90	310	352	82

TECHNICAL SPEC.

1. DESIGN&MAN.ACC.TO GB/T12224;
2. FLANGE DIMENSION ACC.TO HG/T20592-2009;
3. FACE TO FACE ACC.TO GB/T17213.3-2005;
4.TEST&SPEC. ACC. TO JB/T7387-2002;
5. LEAKAGE TEST ACC. TO ANSI/FCI70-2。

标记	处数	分区	更改文件号	签名	日期
设计			标准化		
审核					
工艺			批准		

Globe Series - EDTS Electric Single Seat Control Valve - Electric Actuator

阶段标记				质量	比例
S	A	B	C		1:4

共1张 第1张

ZHEJIANG PARI WORLD AUTO. METER CO.,LTD

Dimensions drawing

EDTS.40/100-16-10-WX