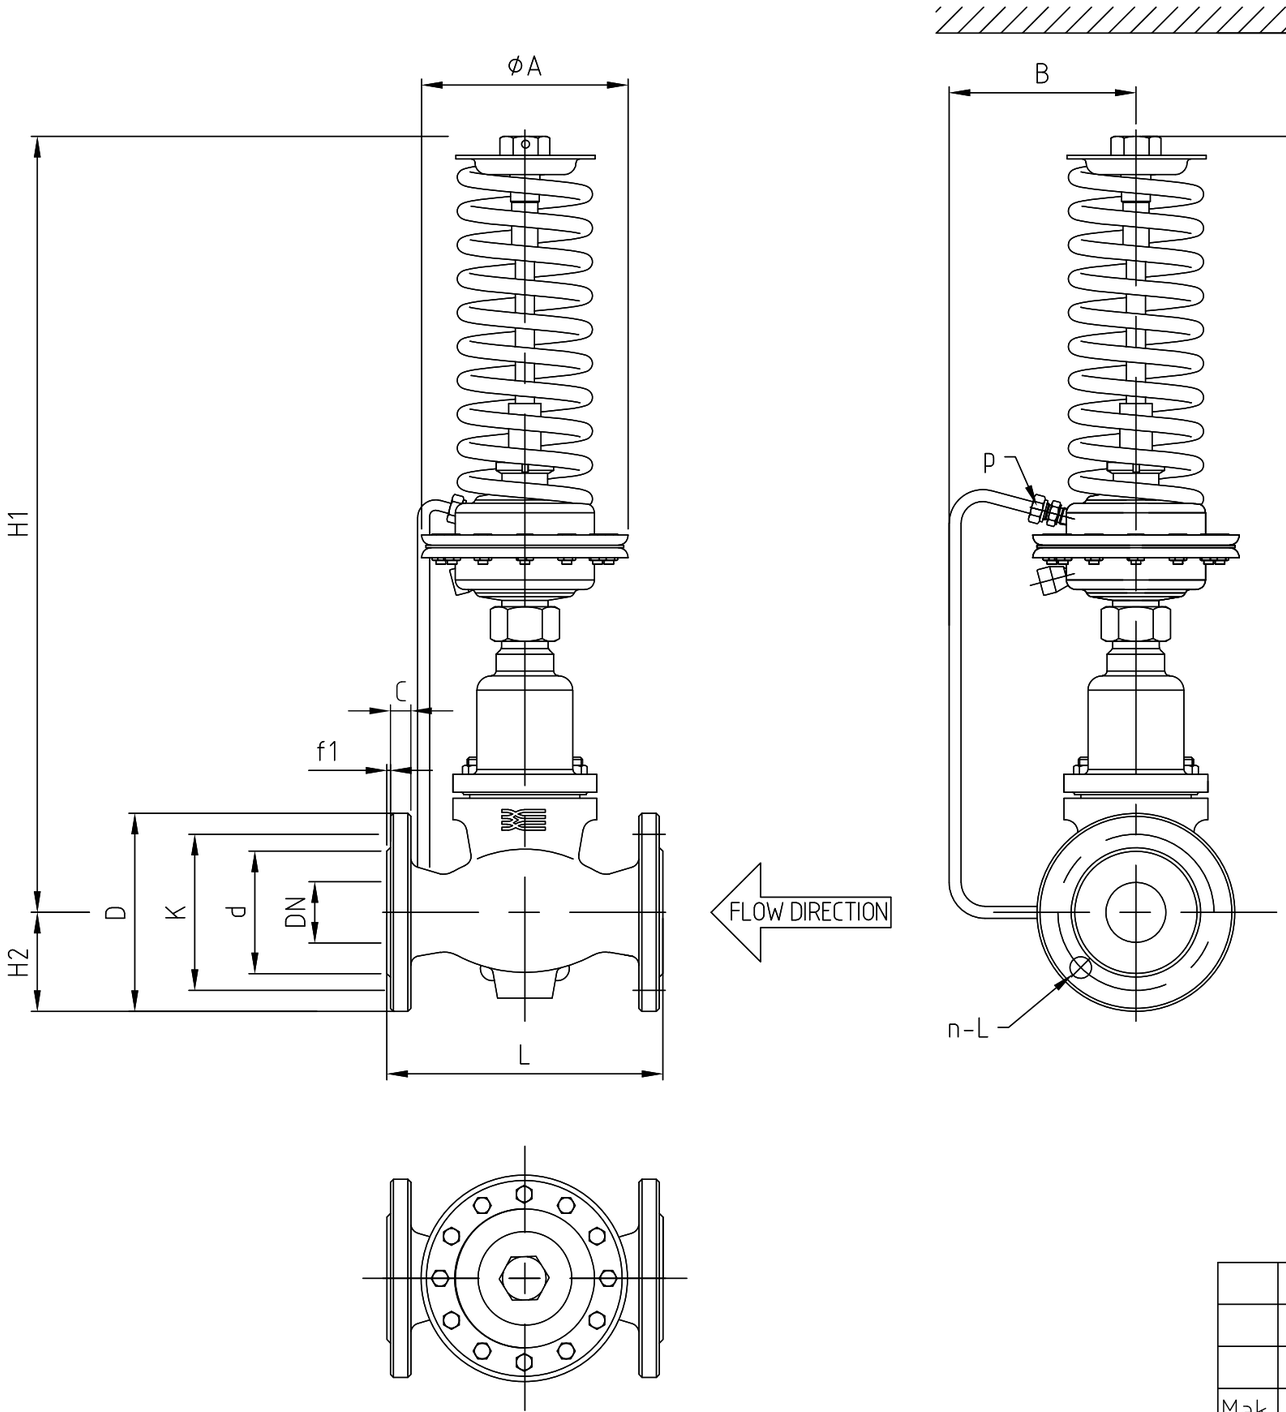


SPEC.			
	PRESSURE	ANSI 150	
TEST	SHELL (LIQ)	3.00	MPa
	SEAL (LIQ)	2.20	
	LEAKAGE	0.35	
OPE.TEMP.		-20℃~+150 ℃	

General considerations

P: Steel pipe Φ 10 × 1 card sleeve type pipe joint Rc1/4 ", used for connecting valves and user instrument air sources (seller connection)
All dimensions are: mm

TECHNICAL SPEC.

1. DESIGN&MAN.ACC.TO GB/T12224;
2. FLANGE DIMENSION ACC.TO ASME B16.5;
3. FACE TO FACE ACC.TO JB/T11049;
4. TEST&SPEC. ACC. TO JB/T11049;

NO.	Nominal Size		Rating	End Connection (ASME B16.5-2009 RF)					
	DN	NPS		D	K	d	f1	C	n-L
1	DN15	½	CL150	90	60.3	34.9	2.0	9.6	4-16
2	DN20	3/4	CL150	100	69.9	42.9	2.0	11.2	4-16
3	DN25	1	CL150	110	79.4	50.8	2.0	12.7	4-16
4	DN32	1¼	CL150	115	88.9	63.5	2.0	14.3	4-16
5	DN40	1½	CL150	125	98.4	73.0	2.0	15.9	4-16
6	DN50	2	CL150	150	120.7	92.1	2.0	17.5	4-19
7	DN65	2½	CL150	180	139.7	104.8	2.0	20.7	4-19
8	DN80	3	CL150	190	152.4	127.0	2.0	22.3	4-19
9	DN100	4	CL150	230	190.5	157.2	2.0	22.3	8-19

Continuing the table above

NO.	Actuator	H1	H2	H3 For act.min .high	A	B	F T F L	Wet. (kg)
1	ZA3	732	45	300	380	260	130	35
2	ZA3	732	50	300	380	260	150	35.5
3	ZA3	758	54	300	380	260	160	38
4	ZA3	758	59	300	380	260	180	41
5	ZA3	760	64	300	380	260	200	42
6	ZA3	760	76	300	380	260	230	45
7	ZA3	795	89	300	380	260	290	57
8	ZA3	795	95	350	380	300	310	61
9	ZA3	900	145	350	380	300	350	88

Mak.	NO.	Mod.	File No.	signa.	Date
Desig			Stad.		
Che.					
Tec.			Appro.		

K-series-Self operated pressure regulating valve-ZA3actuator

PARI WORLD
ZHEJIANG PARI WORLD AUTO. METER CO.,LTD

Assembly drawing

K23001.15/100-150-WX